



### [ SPECIFICATION ]


- Compact body
- Waterproof (※ when unused)
- A variety of ways to mount
- USB Socket: 5V1A / Cigarette Socket: 12V10A

### [ TYPES ]

- USB x 1port
- USB x 2ports
- Cigarette Socket x 1port
- USB x 1port & Cigarette Socket x 1port
- USB x 2ports & Cigarette Socket x 1port

### [ WIRING ]


1. Disconnect the negative terminal of the vehicle's battery.
2. Connect the Red wire to battery (+) or to DC12V "Ignition Plus".  
When connected "Ignition Plus", cut the wire after the fuse.
3. Connect the Black wire to Ground (-).

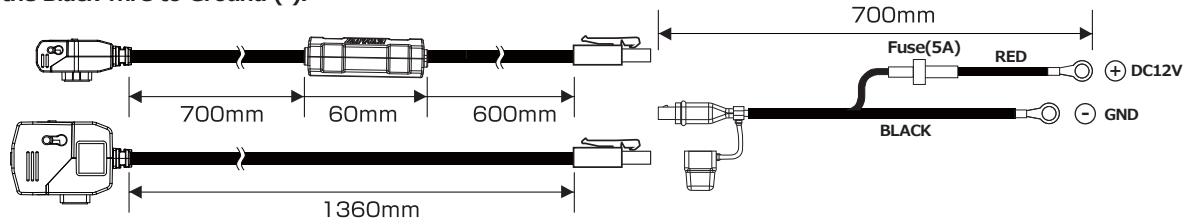


### [ HOW TO MOUNT ]

#### ■ on handlebar ■


- ① Install the clamp on handlebar.



- ② Pass the detachable cable tie through the hole of socket body.





- ③ Put the socket body onto the dimple of the clamp and then tie down the detachable cable tie.

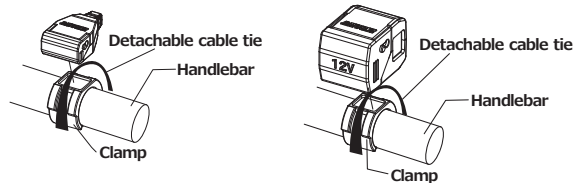


#### ■ using double-sided tape ■

- ① Degrease the surface of mounting location.
- ② Attach the socket body using the double-sided tape.

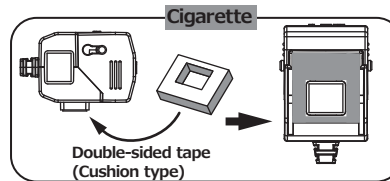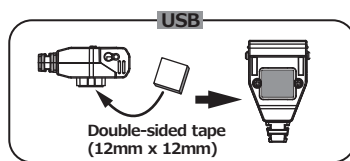

#### ■ USB & cigarette socket connection ■

- ① Put the double-sided tape (12x12) on the bottom of USB socket.
- ② Attach the USB socket at the dimple of cigarette socket.
- ③ Mount the cigarette socket using the clamp or double-sided tape.

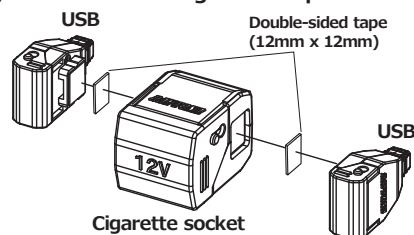

### [ CAUTION ]

- Designed for 12V only. Do NOT use for 6V/24V.
- Previously check the maximum electric power of the device to be connected, do NOT use any device over Max. current might cause malfunction or fire.
- Do NOT use any device over 1A(5W) for USB socket, it may not be charged.
- Disconnect the white connector when unused for a long time to save battery drain.
- Cigarette lighter plug cannot be used.
- Waterproof by capping, be careful if it rains or when unused.
- Connecting devices must not be guaranteed for any cases used with these sockets.